

FRONT DECK CANOPY SHOWN AS DASHED.


WALKWAYS FALL TOWARDS OUTER EDGE OF BOAT.

GRAVITY FED WATER TANK ABOVE STAIRS.

EXISTING AIR CONDITIONING DUCT.

FIRST FLOOR PLAN

1 : 1 0 0

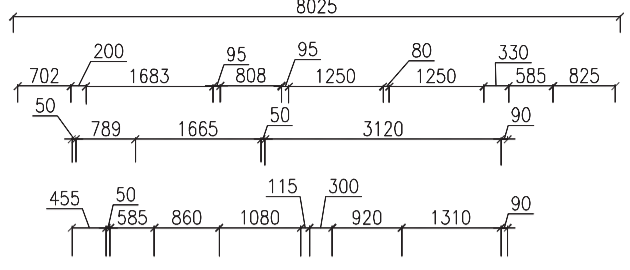

SYMBOLS

- (D-09) DOOR NUMBER
- (G-09) GATE NUMBER
- (W-02) WINDOW NUMBER
- DP DOWN PIPE
- ⊙ FIXED GAS OUTLET
- ⊕ FIXED WATER OUTLET (TAP)
- REL. +XXXXX RELATIVE FLOOR LEVELS.
- J JOINERY UNIT.

ACCESS PANELS

1. NON PERISHABLE STORAGE AREA.
2. BATTERY BANK FOR SOLAR PANELS.
3. WATER PUMP ACCESS PANEL.
4. FULE PUMP ACCESS PANEL.
5. MOTER BATTERY ACCESS PANEL 1.
6. MOTER BATTERY ACCESS PANEL 2.

WALL FINISHES

- EXTERNAL WALLS -LIGHTWEIGHT CLADDING OVER 90x45 MGP10 STUD FRAMING @ 600 CENTRES MAX. REFER TO ELEVATIONS FOR CLADDING TYPE
- INTERNAL WALLS LOWER STORY -LIGHTWEIGHT PLYWOOD PAINT FINISH OR TUNG & GROVE WOOD WALL PANELING VARNISH FINSH. OVER 90x45 MGP10 STUD FRAMING @ 600 CENTRES MAX. INSULATED AND FOLLED.
- INTERNAL WALLS FIRST FLOOR -LIGHTWEIGHT PARTICLE BOARD PAINT FINSH. OVER 90x45 MGP10 STUD FRAMING @ 600 CENTRES MAX. INSULATED AND FOLLED.

FLOOR FINISHES

- (TB) INTERNAL FLOORING TIMBER FLOOR
- (LM) INTERNAL WET AREAS LAMINATED CARPET
- (CP) CARPET
- (EC) EXTERNAL CARPET
- (TD) EXTERNAL TIMBER DECK

HouseBoat ~ Riverlady
J & V Gibb.

drawing:	job:	revision:
PL01	1001-HBRL	B
Date:	Computer file:	scale:
OCT10	HBRL-PL-WIP	1:100

revision	amendment	date
B	APPROVALS	24-11-10

RCG Designs